
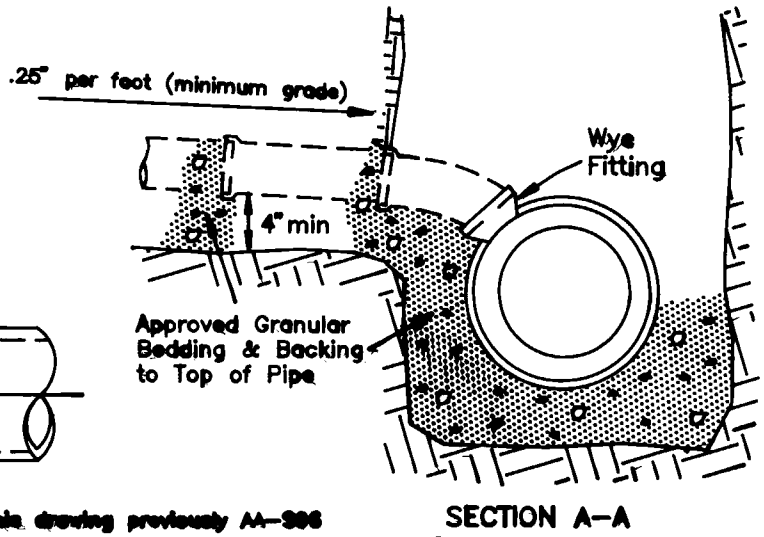


NOTES:

Trench Dams are required as specified under 918.04 and shall be constructed to 36" over the pipe.

Sanitary house connection services shall be connected to the existing sewer with the same material fitting or with a compatible adaptor in accordance with 915 and 918.02

Approved Stopper until connected to house plumbing

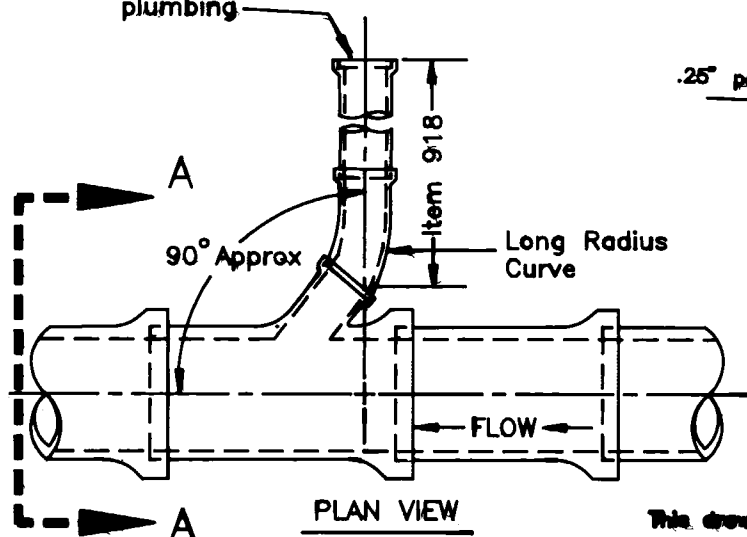

This drawing previously AA-906

Stephen J. Salas
SEAL. CIVIL ENGINEER

Anthony J. Salas
ENGINEER

TYPICAL SANITARY HOUSE CONNECTION SERVICE

CITY OF COLUMBUS, OHIO.
DEPARTMENT OF PUBLIC UTILITIES
DIVISION OF SEWERAGE & DRAINAGE

STANDARD
CONSTRUCTION DRAWING



DR. CAW
CK. DJH

SHEET 1
OF 2


FILE NO.
AA-S160

12/15/93
APPROVED

REVISED

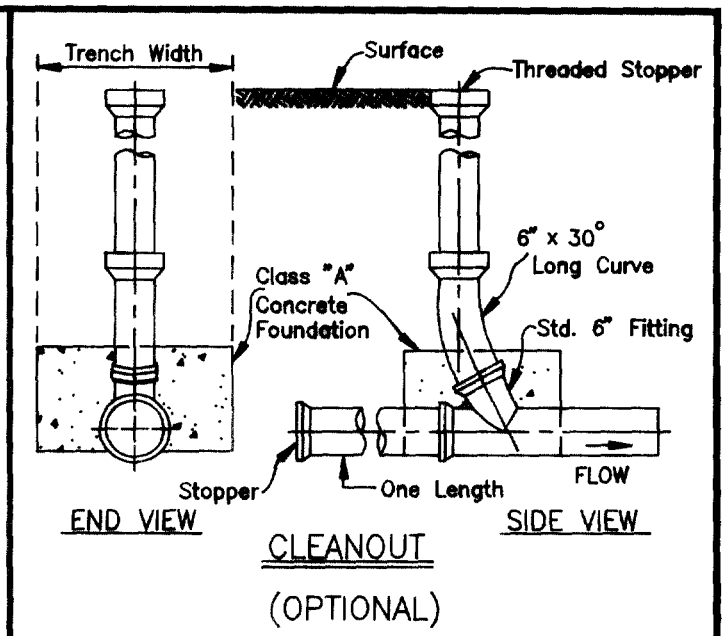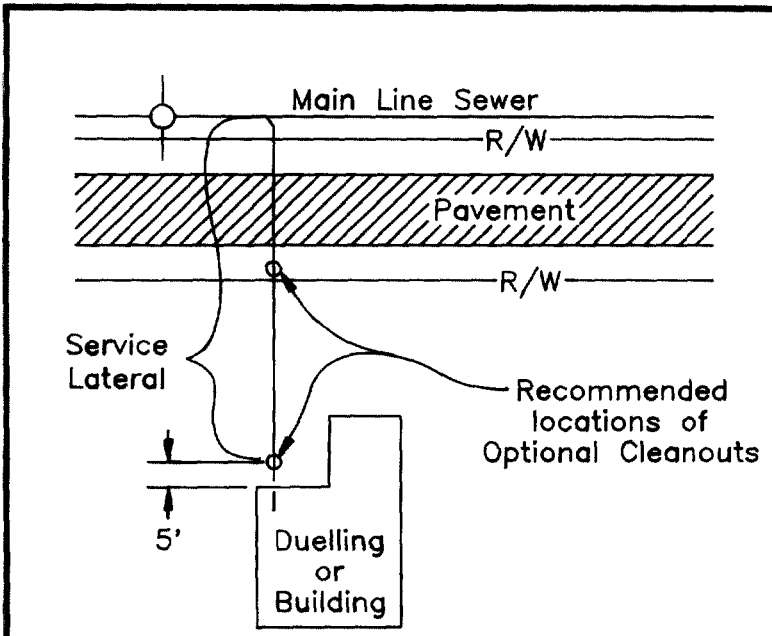

ALLOWABLE CONNECTIONS — SANITARY HOUSE CONNECTION TO BUILDING WASTE LINE

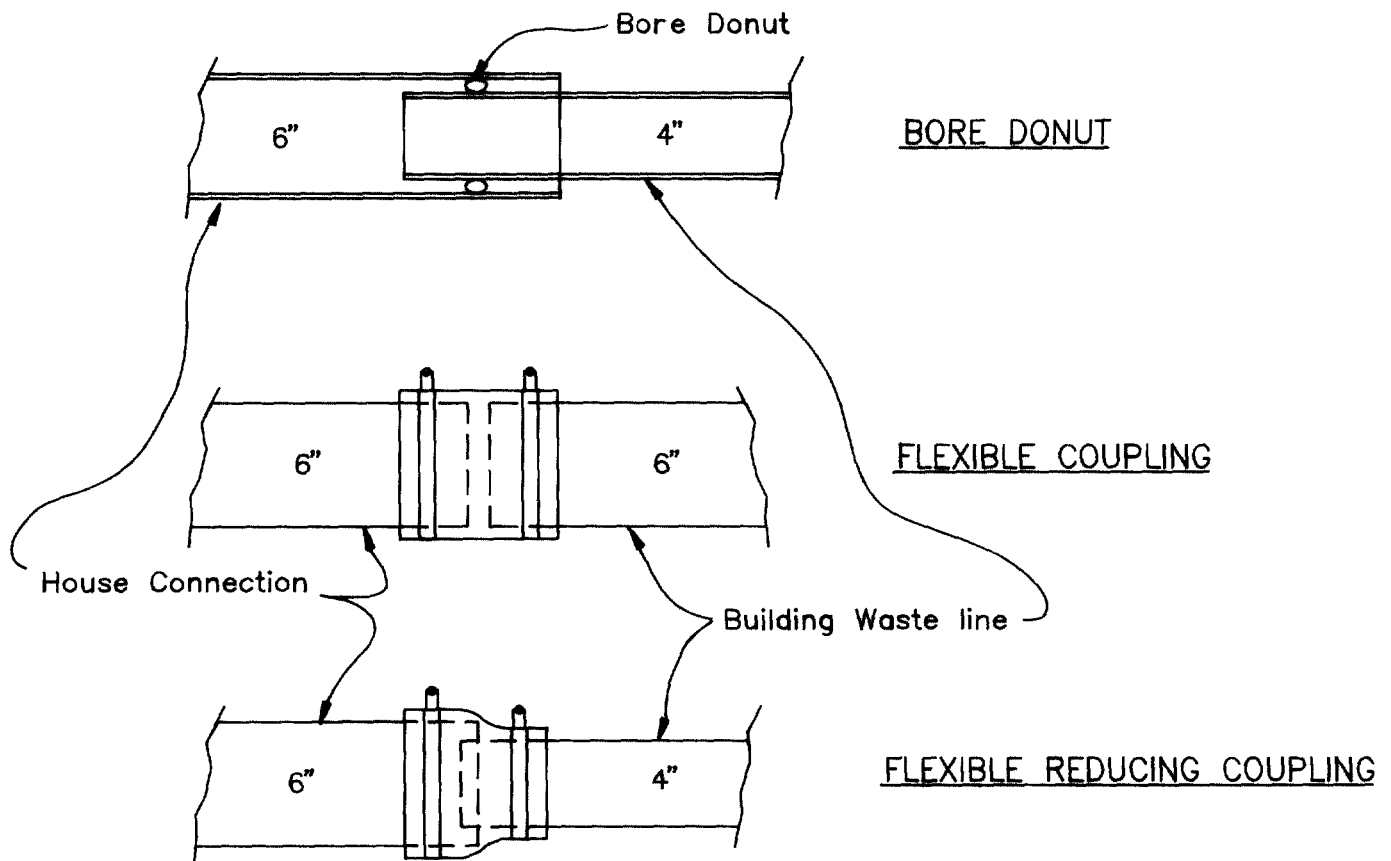

COUPLING CLAMPS SHALL BE STAINLESS STEEL

Stephen J. Salay
SEWER SYSTEMS ENGINEERING MANAGER

Jerry Francis
ADMINISTRATOR

TYPICAL SANITARY
HOUSE CONNECTION
SERVICE

CITY OF COLUMBUS, OHIO.
DEPARTMENT OF PUBLIC UTILITIES
DIVISION OF SEWERAGE & DRAINAGE

STANDARD
CONSTRUCTION DRAWING

12/15/93
APPROVED

REVIEWED

DR. W.C.K.	SHEET 2	FILE NO.
CK. DJH	OF 2	AA-S160